


KR50-56

**6.7"/170MM
OFFSET PLASTIC**

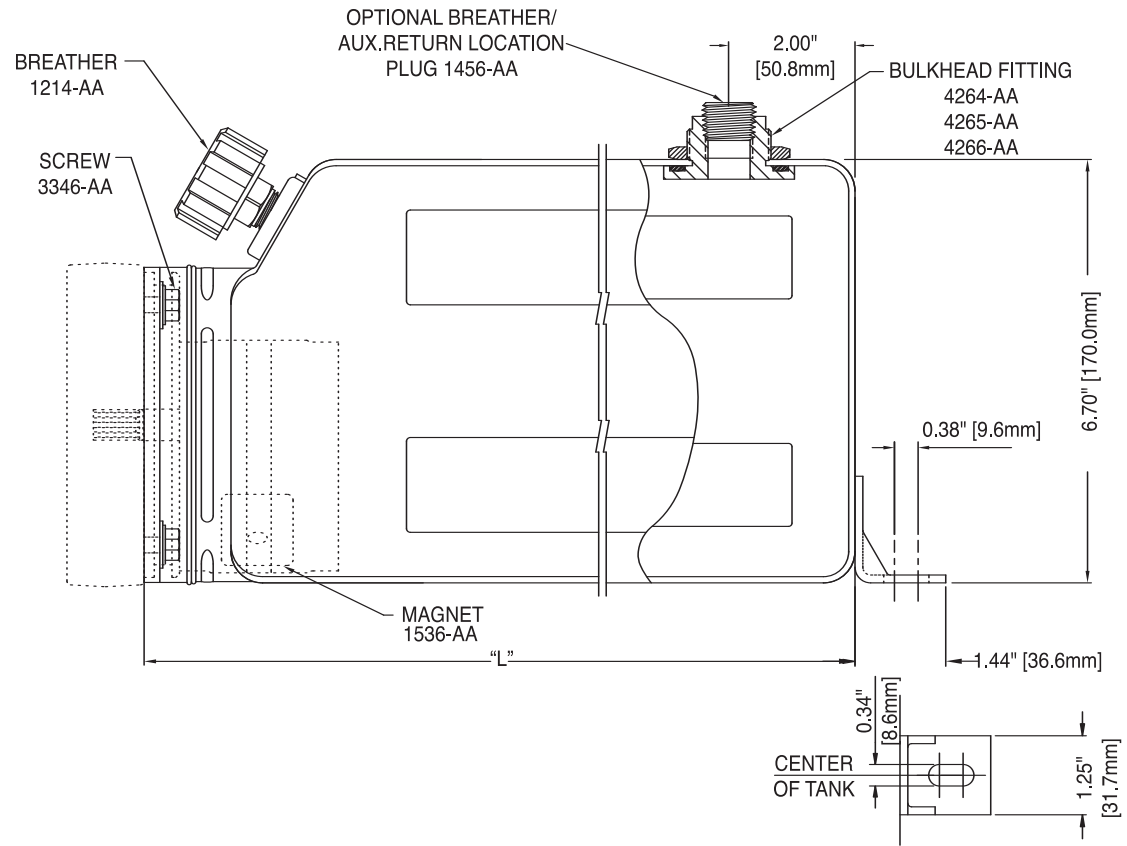

KIT NO.	NOM. CAP. (GAL.)	TANK LENGTH		USEABLE OIL CAPACITY			
		MM	INCH	LITRE	VERTICAL CUBIC IN.	LITRE	HORIZONTAL CUBIC IN.
KR50	1.0	190	7.50	1.9	120	3.1	186
KR55	1.2	288	9.00	2.9	180	3.8	230
KR51	1.5	279	11.00	4.3	260	4.7	286
KR52	2.0	330	13.00	5.6	340	5.6	345
KR56	2.5	381	15.00	6.9	420	6.6	400
KR53	3.0	508	20.00	10.2	620	8.8	540
KR54	4.0	660	26.00	14.1	860	11.7	715

Foot included on 1.5 gallon and larger.
 Shimming may be required at installation.
 Do not use KR50 or KR55 with duplex pump units.